


## WIPER MOTOR WIRING

The wiring for a 2 speed wiper motor with 4 wires is as follows:

Wiper Motor	Harness
Blue	Brown/White
Blue/Red	Add new wire from pin 1 on wiper switch
Blue/Black	Red/White
Blue/White	Red

Ground wire to motor mounting bolt

This picture shows the Birkin chassis wiring loom for the wiper motor,

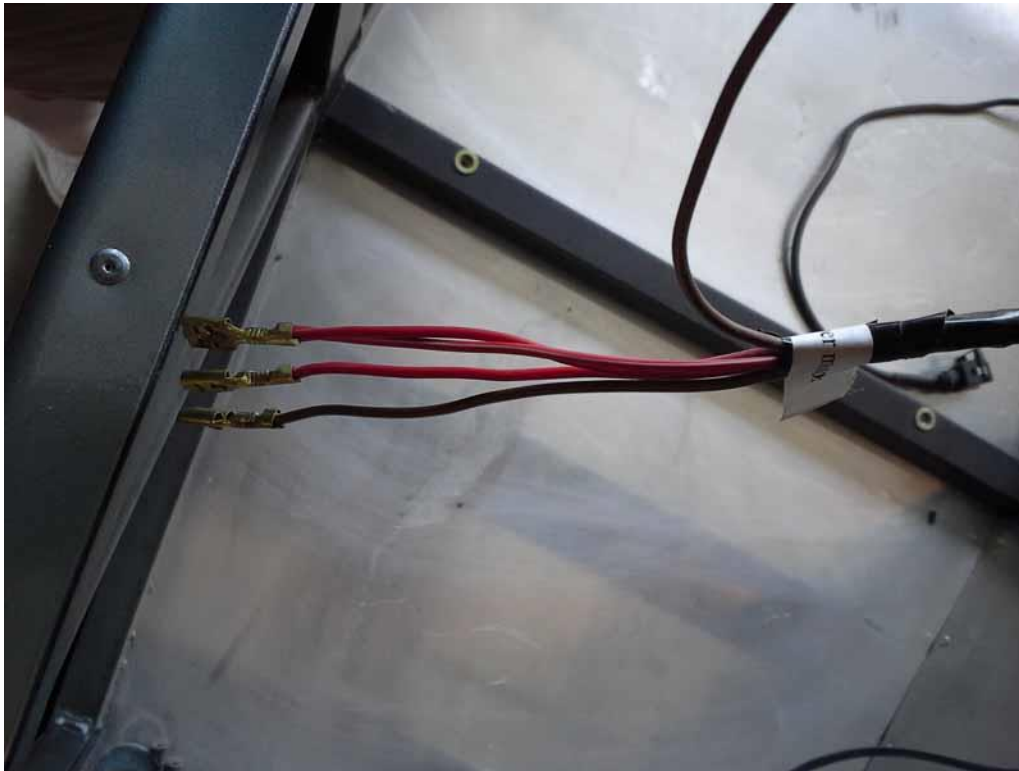

there are 3 wires here that connect to the motor as shown in the chart at the top of the page.


This picture shows the 3 wires from the Birkin wiring loom and the white wire added to make the 2 speeds work, as well as a ground wire from the chassis to the motor mounting bolt.



This picture shows the Birkin wiring loom with the added white wire attached to it.



This photo shows the wires at the back of the wiper switch.

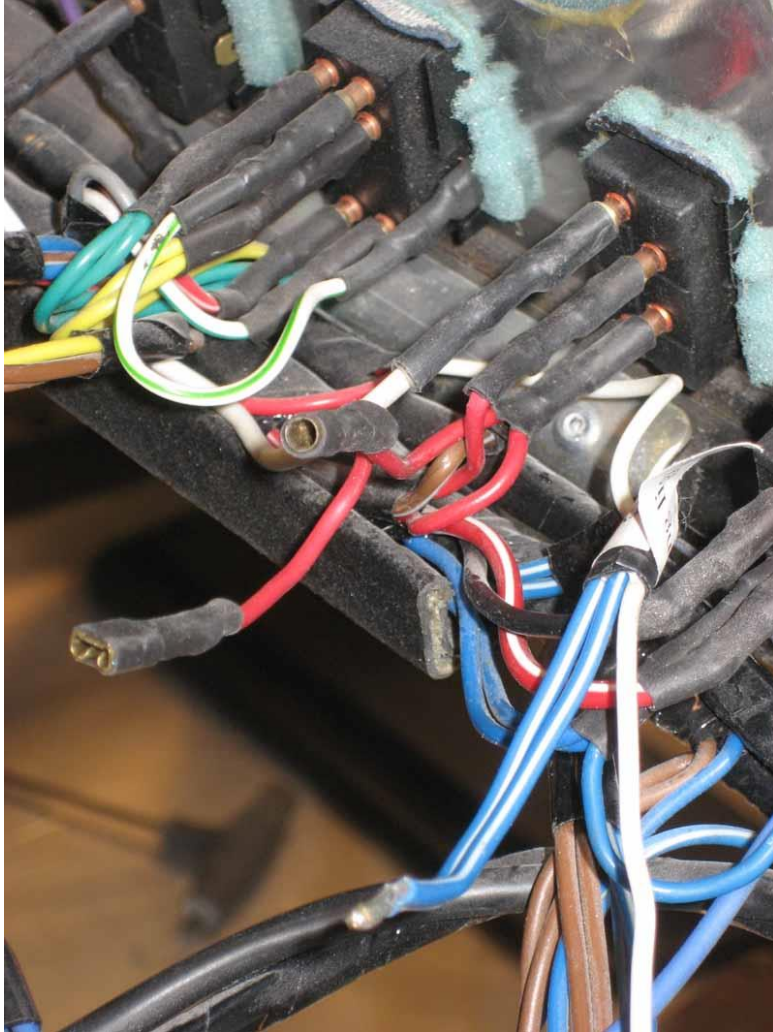

I have found this to work with the 4 wire wiper motors I have installed, your motor may be different and this wiring may not work with your motor and may cause damage to the motor and or the chassis wiring loom. I AM NOT RESPONSIBLE FOR ANY DAMAGE THAT MAY BE CAUSED BY USING THIS WIRING METHOD. IT IS YOUR RESPONSIBILITY TO VERIFY THE WIRES IN THE CHASSIS LOOM AND THE MOTOR GO TO THE CORRECT LOCATIONS.